

# Model H105

## 6.5 litre Ultrasonic cleaner

|                                       |   |   |
|---------------------------------------|---|---|
| Time control (digital)                | : | 30 seconds to 15 minutes and continuous |
| Rated voltage                         | : | 220-240 Volts AC, 50-60 Hz              |
| Tank dimensions (mm)*                 | : | 295mm x 230mm x 150mm (L x W x D)       |
| External dimensions (mm)*             | : | 385mm x 335mm x 265mm (L x W x D)       |
| Working capacity                      | : | 6.5 litres                              |
| Maximum capacity                      | : | 8.5 litres                              |
| Net weight (excluding accessories)    | : | 6.25 kg                                 |
| Gross boxed weight (inc. accessories) | : | 16.35 kg                                |
| Typical generator peak output**       | : | 850 watts                               |
| Typical power consumption**           | : | 420 watts                               |
| Typical ultrasonic power per litre**  | : | 65 watts                                |
| Operating frequency**                 | : | 48 kHz +/- 2 kHz                        |
| Case construction                     | : | EN10088 Stainless steel                 |
| Tank construction                     | : | BS304 Stainless steel                   |
| Chassis construction                  | : | BS1449 Aluminium                        |
| Lid construction                      | : | BS304 Stainless steel                   |
| Basket and tray assembly              | : | Electropolished BS304 Stainless steel   |
| Basket dimensions                     | : | 240mm x 170mm x 15mm (L x W x D)        |
| Warranty                              | : | 3 years                                 |
| Transducer warranty                   | : | 5 years                                 |

\* Dimensions and weights are approximate.  
Internal dimension is taken at the top of the tank.  
Dimensions at the base are smaller.  
External dimensions include the feet, lid and  
Protruding sockets, draining parts and handles.

\*\* Dependent on tank loading, cleaning fluids used  
and mains voltage. Refer to the in-built monitor  
for accurate instantaneous power consumption  
and frequency. The typical power consumption  
and typical generator peak output is based on  
the power being set to 100%.



# Model H105

## 6.5 litre Ultrasonic cleaner

Walker Electronics Ltd ultrasonic cleaners offer an easy to use and reliable method of cleaning a wide range of instruments and components in healthcare, dentistry, chiropody, veterinary, tattooing, jewellers etc.




Walker Electronics Ltd have been manufacturing and supplying ultrasonic cleaners for over 60 years and are a market leader in ultrasonic cleaning. All our ultrasonic cleaners are manufactured in Collingham, UK. All repairs and validations are also carried out by our skilled technicians on this site.

The H105 is our flagship model, featuring touch screen controls and full cycle recording including cycle length, date and time, minimum, maximum and mean cycle power and frequency. Each cycle is given a unique cycle number and operator identification for validation and traceability.

Features include:

- \* Supplied with lid, 1M mains lead, USB drive with adaptor and operator's manual
- \* Also supplied with Instrument rack to hold 3 trays and/or baskets.  
11 instruments on a tray / basket for forceps etc.  
**2 instrument trays and 1 basket INCLUDED.**
- \* Complies with HTM 01-05 and BS EN61010-1
- \* Low/no fluid sensing.
- \* Fast 3–6-minute cycles
- \* Drain outlet.
- \* Interlocking lid – pauses the cycle when the lid is lifted
- \* Automatic 90 second degas cycle after cleaning fluid change.
- \* Temperature control to prevent coagulation of proteins factory set at 45°C.
- \* Validation of each cycle recording user, date, time, cycle number, frequency and power
- \* PIC chip technology –reprogrammed on annual service.
- \* Supplied with samples of cleaning solution.
- \* Integral data logger for up to 100 cycles. Easily transfer logs to memory stick provided.
- \* RS232 port for connection of a receipt printer
- \* Enhanced electronic control. Continually adjusts the unit's power and frequency for unrivalled cleaning

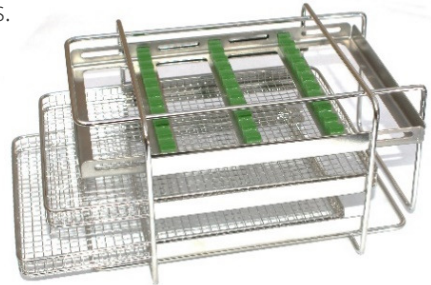

www.walkerelectronics.co.uk  
Collingham, Newark  
Nottinghamshire  
NG23 7LA  
Tel: 01636 892410  
sales@walkerelectronics.co.uk