Ultrasoft Pro
colours for Luxury & Seamless upholstery

Advanced fabric with antimicrobial protection, ink and denim resistance.

Belmont

Ultrasoft Pro upholstery colours

for Belmont's Luxury and Seamless upholstery specifications

See product images in your preferred colours online at belmontdental.co.uk

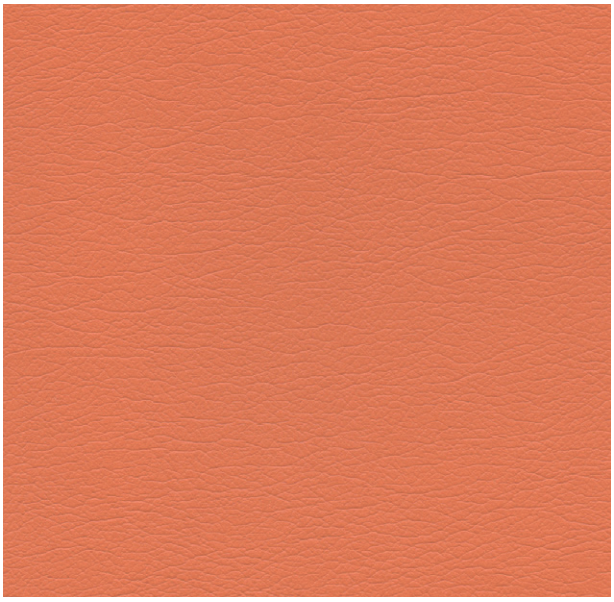

554-8254 Rosy Coral

554-0008 White Wash

554-6566 Moon Glow

554-5648 Cloud

554-5733 Mortar

554-5626 Char

554-5618 Dark Knight

554-3811 Swan

554-3352 Shore

554-3595 Cork

554-3444 Toasted Bagel

554-8251 Melon

554-8254 Rosy Coral

554-8229 Campfire

554-1329 Rhubarb

554-1357 Cranberry

554-5649 Ember

Luxury upholstery

Seamless upholstery

SPECIFICATION

- Ink and denim resistant
- Performance plus
- Antimicrobial protection
- Custom
- Earth friendly

554-3353 Tundra

554-3087 Woodcres

554-3209 Cougar

554-3214 Chestnut

554-4315 Agave

554-2661 Blue Bird

554-2530 Sky

554-2522 Capri

554-9441 Mauve

554-9451 Azalea

554-9336 Aubergine

554-4443 Laurel

554-4534 Sherwood

554-4530 Coastal



554-2711 Blueberry

554-2616 Oxford Blue

554-2547 Sailor

Belmont

Ultrasoft Pro

Ink and denim resistant, antimicrobial, soft-to-touch upholstery fabric

Ink & Stain Resistant | **Performance Plus** | **Antimicrobial** | **Custom**

GENERAL SPECIFICATIONS

Composition:
100% Polyurethane Surface
100% Reinforced Rayon Backing

Weight:
Approx. 9.7 Ounces Per Square Yard
Approx. 330 Grams Per Square Metre

Thickness:
Approx. 0.95 Millimetres

Width:
54 Inches / 137 Centimetres

PERFORMANCE

Abrasion:
ASTM 04157 / 500,000 Double Rubs (Wyzenbeek)*
BS 2543 / 200,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:
14+ Weeks
ASTM D3690-02 SECT. 6.11 (Hydrolytic Stability)
ISO 1419 METHOD C (Accelerated Ageing)

Adhesion of Coating:
ASTM D751

Tear Strength:
ASTM D2261

Breaking Strength:
ASTM D5034

Antimicrobial:
ASTM E2180

COLOURFASTNESS

Light Fastness:
AATCC 16.3, 200 Hours, Grade 4-5

Crocking:
AATCC 8, Class 5 Wet & Dry

FLAMMABILITY

F/R Rating:
ASTM E84 (Adhered) - Class A
CA TB 117-2013 - Pass
FMVSS 302 & 95/28 Annex IV - Pass
NFPA 260 - Class 1
UFAC - Class 1

Other Tests*:
ASTM E84 (Unadhered)
BS 5852 PT 0, 1 & 5 (Crib 5)
BS 5867 Part 2 Type B
BS 7175
California Technical Bulletin 133
FAR Specifications
IMO A.652 (16)
NFPA 701

*These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform well under these fire test conditions.

EARTH FRIENDLY

- GREENGUARD Certified
  - Meets Stringent VOC emission standards
  - Promotes healthier indoor air quality
  - Contributes to LEED™ and BIFMA level® credits
- Compliant with Prop 65
- Less than 100PPM of antimicrobial treatment
- No Conflict Minerals
- No Flame Retardants (ex. Halogenated, Brominated)
- No PBDEs (Polybrominated Diphenyl Ethers)
- No Plasticizers, Heavy Metals, Stabilizers, Phthalates or Bisphenol A (BPA)
- No POPs (Pertistent Organic Pollutants)
- No PVC (Polyvinyl Chloride)
- No toxic by-products
- Over 99% of solvents recaptured and recycled

For more information on our fabrics, cleaning and care instructions, please visit www.ultrafabricsllc.com and refer to the Care and Cleaning Guidelines page.

Made in Japan

Belmont

For any enquiry, do not hesitate to contact us directly on 020 7515 0333 or visit **belmontdental.co.uk**